


Quick Reference

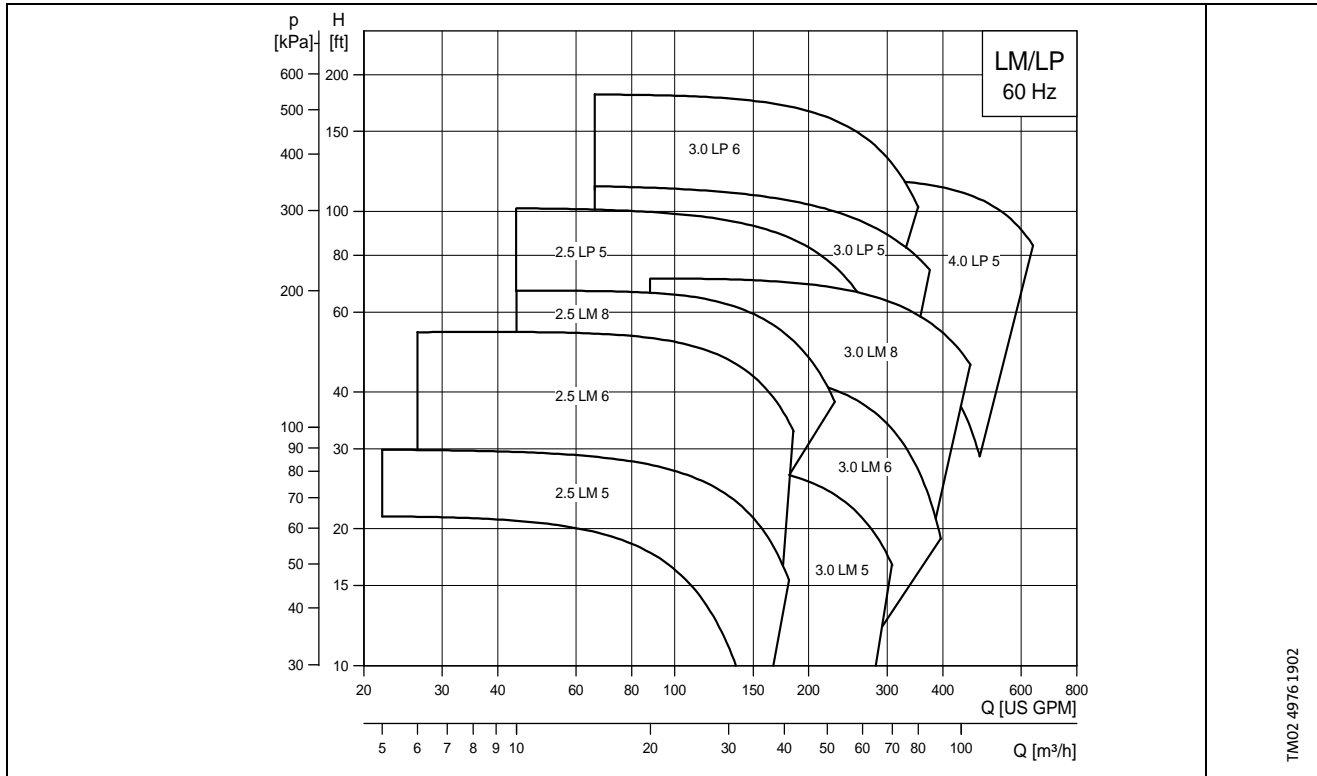

TM02 4976 1902

MODEL	FLOW	HEAD	PH	HP	FLANGE	PAGE #
2.5 LM5/4.6	30-160 U.S. GPM	8-22 Feet	1, 3	3/4	2 1/2" ANSI	8
2.5 LM5/5.2	30-175 U.S. GPM	14-30 Feet	1, 3	3/4	2 1/2" ANSI	8
2.5 LM6/6.2	30-170 U.S. GPM	18-40 Feet	1, 3	2	2 1/2" ANSI	10
2.5 LM6/6.9	30-185 U.S. GPM	33-54 Feet	1, 3	3	2 1/2" ANSI	10
2.5 LM8/8.0	30-220 U.S. GPM	40-66 Feet	1, 3	5	2 1/2" ANSI	12
3.0 LM5/4.6	60-265 U.S. GPM	6-18 Feet	1, 3	1	3" ANSI	14
3.0 LM5/5.0	60-300 U.S. GPM	10-22 Feet	1, 3	1 1/2	3" ANSI	14
3.0 LM5/5.4	60-320 U.S. GPM	16-28 Feet	1, 3	2	3" ANSI	14
3.0 LM6/6.3	60-340 U.S. GPM	20-38 Feet	1, 3	3	3" ANSI	16
3.0 LM6/6.6	60-350 U.S. GPM	27-46 Feet	1, 3	5	3" ANSI	16
3.0 LM8/7.4	60-340 U.S. GPM	44-58 Feet	1, 3	5	3" ANSI	18
3.0 LM8/8.3	60-380 U.S. GPM	56-72 Feet	1, 3	7 1/2	3" ANSI	18
2.5 LP5/4.3	44-250 U.S. GPM	37-76 Feet	1, 3	5	2 1/2" ANSI	20
2.5 LP5/4.6	44-270 U.S. GPM	47-87 Feet	1, 3	5	2 1/2" ANSI	20
2.5 LP5/5.0	44-285 U.S. GPM	67-105 Feet	1, 3	7 1/2	2 1/2" ANSI	20
3.0 LP5/4.5	66-340 U.S. GPM	38-80 Feet	1, 3	5	3" ANSI	22
3.0 LP5/4.9	66-350 U.S. GPM	60-91 Feet	1, 3	7 1/2	3" ANSI	22
3.0 LP5/5.2	66-370 U.S. GPM	73-114 Feet	1, 3	10	3" ANSI	22
3.0 LP6/5.6	66-290 U.S. GPM	70-133 Feet	3	15	3" ANSI	24
3.0 LP6/6.1	66-310 U.S. GPM	85-160 Feet	3	15	3" ANSI	24
3.0 LP6/6.6	66-330 U.S. GPM	100-180 Feet	3	20	3" ANSI	24
4.0 LP5/4.3	110-450 U.S. GPM	35-66 Feet	1, 3	7 1/2	4" ANSI	26
4.0 LP5/4.9	110-540 U.S. GPM	50-86 Feet	1, 3	10	4" ANSI	26
4.0 LP5/5.2	110-580 U.S. GPM	72-105 Feet	3	15	4" ANSI	26
4.0 LP5/5.5	110-620 U.S. GPM	90-125 Feet	3	20	4" ANSI	26