


Technical data

UP Series
UP 15-10F/FR

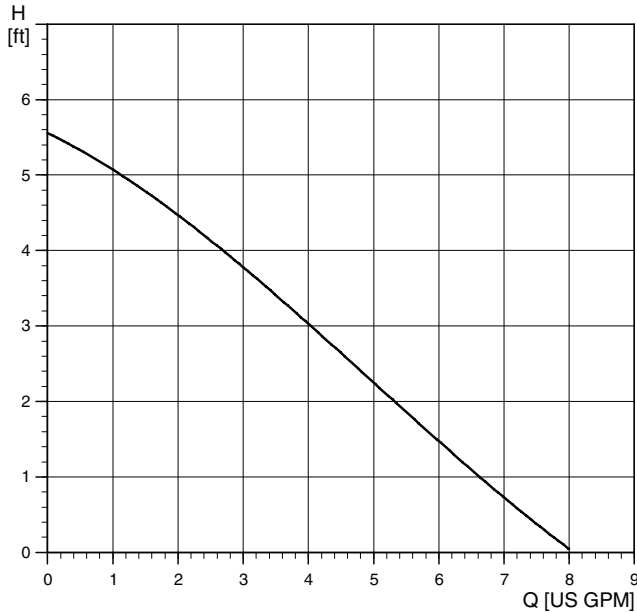


TM03 5532 0907

Flow range: 0-8.0 U.S. gpm
 Head range: 0-5.5 feet
 Motors: 2-pole, single-phase
 Max. liquid temperature: 230 °F (110 °C)
 Min. liquid temperature: 36 °F (2 °C)
 Max. system pressure: 145 psi
 Closed system


Model	Volts	Amps	Watts	Hp	Capacitor
UP 15-10F/FR	115	0.23	25	1/25	2µF/400 V

UP 15-10F

UP 15-10FR

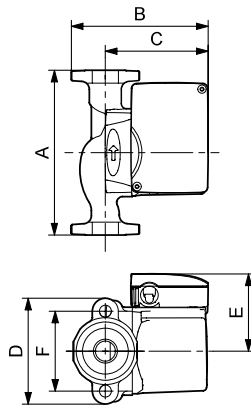

TM03 8526 1907

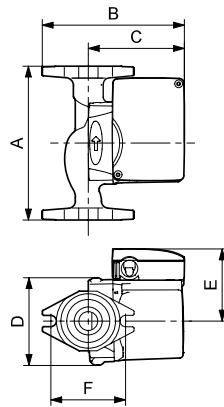

TM03 8527 1907

Model type	Product number	A	B	C	D	E	F	Connection type and size	Shipping weight [lbs]
UP 15-10F	59896248	6 1/2	5 1/4	4	4 3/16	3 1/4	3 5/32	GF 15/26 flange (2) 1/2" dia. bolt holes	7 1/4
UP 15-10FR	59896249	6 1/2	5 15/16	4	3 3/4	3 1/4	3 5/32	GF 15/26 flange (2) 1/2" dia. bolt holes	7 1/4