


Technical data

UP Series
UP 26-116F/BF

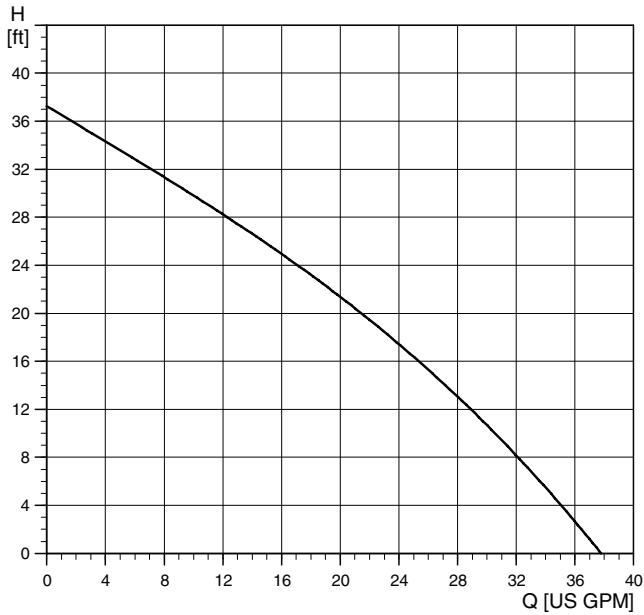


TM03 5577 0907



Flow range: 0-37 U.S. gpm
 Head range: 0-37 feet
 Motors: 2-pole, single-phase
 Max. liquid temperature: 150 °F (65 °C)
 Min. liquid temperature: 32 °F (0 °C)
 Max. system pressure: 145 psi
 Closed system (F) and Open system (BF)

Model	Volts	Amps	Watts	Hp	Capacitor
UP 26-116F/BF	230	1.8	385	1/6	2.5µF/380 V


UP 26-116F



UP 26-116BF



TM03 8758 2407



TM03 8543 1907

Model type	Product number	A	B	C	D	E	F	Connection type and size	Shipping weight [lbs]
UP 26-116F	52722377	6 1/2	6 3/8	5 1/16	4 1/8	3 1/2	3 5/32	GF 15/26 flange (2) 1/2" dia. bolt bores	12 1/2 lbs
UP 26-116BF	52722393	6 1/2	6 3/8	5 1/16	4 1/8	3 1/2	3 5/32	GF 15/26 flange (2) 1/2" dia. bolt bores	12 1/2 lbs